



- 700 cd/m<sup>2</sup>
- 24/7
- RS232C
- PORTRAIT
- Slim Line
- DISPLAY PORT
- LED
- Remote
- HDMI
- FHD HD
- COMPONENT VIDEO
- Speaker
- Vt
- VESA



**IPS**

IPS tehnologija nudi veći kontrast, tamnije crne i mnogo bolje uglove gledanja od standardne TN tehnologije. Ekran će izgledati dobro bez obzira pod kojim ga uglom gledate.



**OPS PC SLOT**

Ugrađeni slot za proširenje podržava Open Pluggable Specification (OPS) standard; pojednostavljuje instalaciju plug-in računara za Digital Signage primenu.

## 01 KARAKTERISTIKE EKRANA

Dizajn	Ultra tanak okvir
Dijagonala	41.9", 106.5cm
Panel	IPS LED, matte finish, haze 10%
Osnovna rezolucija	1920 x 1080 (2.1 megapixel Full HD)
Format ekrana	16:9
Osvetljenje	700 cd/m <sup>2</sup>
Statički kontrast	1300:1
Vreme odziva (GTG)	8ms
Zona gledanja	horizontalno/vertikalno: 178°/178°, desno/levo: 89°/89°, gore/dole: 89°/89°
Podržane boje	1.07B 10bit (8bit + Hi-FRC)
Horizontalna sinhronizacija	30 - 83KHz
Vidljiva površina Š x V	927.94 x 521.96mm, 36.5 x 20.5"
Razmak piksela	0.4833mm
Boja okvra	crna, mat

## 02 KONEKTORI / KONTROLE

Ulaz analognog signala	VGA x1 RCA Kompozitni x1
Ulaz digitalnog signala	DVI x1 HDMI x2 DisplayPort x1
Audio ulaz	Mini konektor x1
Kontrolni ulaz	RS-232c x1 RJ45 (LAN) x1 IR x1
Digitalni izlaz signala	DisplayPort x1 (v.1.2 Daisy Chain multi-stream)
Audio izlaz	Mini konektor x1 RCA (L/R) x1 Zvučnici 2 x 10W
Monitor kontrolni izlaz	RS-232c x1 IC loop x1 OPS Slot x1 (OPS Intel 80 Pin Standard-Slot. Not compatible with OPS-C)
HDCP	da
USB portovi	x1 (v.2.0)

## 03 KARAKTERISTIKE

Dodatno	handles
Maksimalno neprekidno radno vreme	24/7
Video zid / daisy chain	yes
Reprodukcija medija	da
Kućište (okvir)	metal

## 04 OPŠTE

OSD jezici	EN, DE, FR, ES, IT, PT, CN, RU, JP, CZ, NL, PL
------------	--

## Korisničke kontrole

picture (picture style, restore style, backlight, colour, sharpness, noise reduction, MPEG artifact reduction, digital crystal clear, advanced, game or computer, format and edges) sound (sound style, restore style, bass, treble, balance, surround mode, audio out, advanced) tiling (enable, H. monitors, V. monitors, position, frame comp.) general settings (menu language, monitor ID, auto search, clock, scheduling, sleep timer, easylink, auto adjust, local KB lock, RC lock, pixel shift, smart power, wake on lan, switch on state, LED, switch delay, logo, APM, information OSD, displayport ver. network control port, factory settings) network settings (view network settings, network configuration, static IP configuration, digital media renderer-DMR, network name)

## Plug&Play

DDC2B, Mac OSX

## 05 MEHANIČKI

### Orijentacija

pejzaž, portret

### VESA montiranje

200 x 200mm

### Temperatura skladištenja

- 20°C - 60°C

## 06 UKLJUČENI DODACI

### Kablovi

Strujni kabl, DVI, HDMI, mDP - DP, DP, RS-232c

### Upustva

kratko uputstvo, bezbednosni vodič

### Daljinski upravljač

da (baterije uključene)

## 07 UPRAVLJANJE NAPAJANJEM

### Napajanje

interna

### Potrošnja energije

% 1W tipično, 0.5W stand by, 0.5W iskljucen

## 08 ODRŽIVOST

### Propisi

CB, CE, TÜV-Bauart, EAC, RoHS podrška, ErP, WEEE, CU, REACH

### REACH SVHC

iznad 0.1%: Olova

## 09 DIMENZIJE / TEŽINA

### Dimenzije proizvoda Š x V x D


947 x 541 x 71mm

### Težina (bez kutije)

15.3kg

### EAN kod

4948570115860

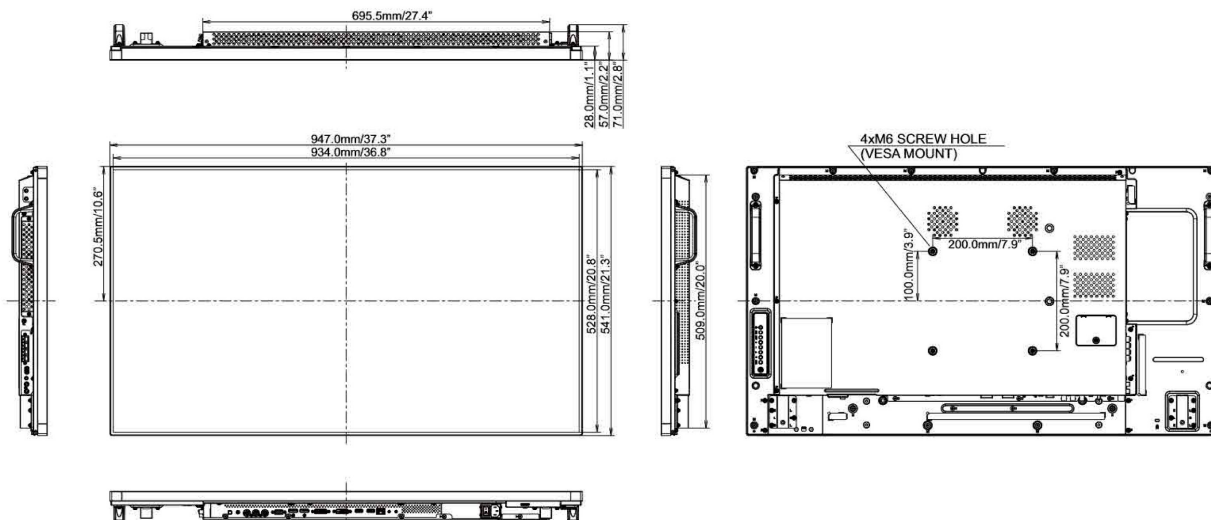

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IIYAMA CORPORATION. ALL RIGHTS RESERVED