



ProLite LE3240S is a 32" Full HD, professional and fan-less LED-backlit display. Incorporating the latest Commercial Grade VA panel technology, the display guarantees great viewing from all angles, high brightness and exceptional colour clarity. A wide range of video and audio inputs ensures compatibility with multiple platforms. ProLite LE3240S is prepared for easy installation using the VESA wall mount. This display will suit a massive range of applications including public signage, retail, exhibitions and conference centres, POS/POI, control rooms and production facilities.



VA matrica

Tehnologija VA panela nudi veći kontrast, tamnije crne i mnogo bolje uglove gledanja od standardne TN tehnologije. Ekran će izgledati dobro bez obzira pod kojim uglom gledate.



USB Playback

Monitor podržava reprodukciju prezentacija, videa i gotovo bilo koje vrste sadržaja sačuvanih na USB uređaju ili u unutrašnjoj memoriji.

01 KARAKTERISTIKE EKRANA

Dijagonala	31.5", 80cm
Panel	VA, haze 2%
Osnovna rezolucija	1920 x 1080 (2.1 megapixel Full HD)
Format ekrana	16:9
Osvetljenje	350 cd/m ²
Statički kontrast	4000:1
Vreme odziva (GTG)	6.5ms
Zona gledanja	horizontalno/vertikalno: 178°/178°, desno/levo: 89°/89°, gore/dole: 89°/89°
Podržane boje	16.7mln
Horizontalna sinhronizacija	30 - 83KHz
Vidljiva površina Š x V	698.4 x 392.85mm, 27.5 x 15.5"
Širina okvira (stranice, vrh, dno)	12mm, 12mm, 17mm
Razmak piksela	0.364mm
Boja okvra	crna, sjajna

02 KONEKTORI / KONTROLE

Ulaz analognog signala	VGA x1 Komponentni video x1 (RGB Y(CVBS)/Pb/Pr)
Ulaz digitalnog signala	DVI x1 HDMI x1
Audio ulaz	RCA (L/D) x1 Mini konektor x1
Kontrolni ulaz	RS-232c x1 RJ45 (LAN) x1 IR x1
Audio izlaz	RCA (L/R) x1 Zvučnici 2 x 10W
Monitor kontrolni izlaz	RS-232c x1 IC loop x1
HDCP	da
USB portovi	x1 (v.2.0 media playback)

03 KARAKTERISTIKE

Maksimalno neprekidno radno vreme	12/7
Reprodukcija medija	da
Kućište (okvir)	plastika

04 OPŠTE

OSD jezici	EN, DE, FR, ES, IT, RU, CZ, NL, PL
Kontrolni tasteri	Power, Mute, Input, +, -, Up, Down, Menu
Korisničke kontrole	picture (picture mode, backlight, contrast, brightness, chroma, phase, sharpness, colour temp., noise reduction, film mode, rest), sound (sound mode, treble, bass, balance, surround, speaker, audio source, reset), screen (PAP setting, display wall, aspect, adjust screen, freeze), setting (language, schedule, power save, control setting, network settings, set monitor ID, HDMI control, advanced, information, reset all)
Plug&Play	DDC2B, Mac OSX

05 MEHANIČKI

Orijentacija	pejzaž
Dizajniran bez ventilatora	da
VESA montiranje	100 x 100mm, 200 x 200mm
Opseg radne temperature (-°/+°)	-0°C - 40°C
Temperatura skladištenja	- 20°C - 60°C

06 UKLJUČENI DODACI

Kablovi	snaga C7, VGA, DVI, RS-232c
Upustva	kratko uputstvo, bezbednosni vodič
Daljinski upravljač	da

07 UPRAVLJANJE NAPAJANJEM


Napajanje	interna
Potrošnja energije	% 1W tipično, 0.5W stand by, 0.5W isključen

08 ODRŽIVOST

Propisi	CB, CE, TÜV-Bauart, RoHS podrška, ErP, WEEE, CU, REACH
Klasa energetske efikasnosti (Regulation (EU) 2017/1369)	G
REACH SVHC	iznad 0.1%: Olova

09 DIMENZIJE / TEŽINA

Dimenzije proizvoda Š x V x D	726.5 x 425.4 x 65.1mm
Dimenzije kutije Š x V x D	818 x 547 x 139mm
Težina (bez kutije)	5.7kg
Težina (sa kutijom)	7.7kg
EAN kod	4948570117550

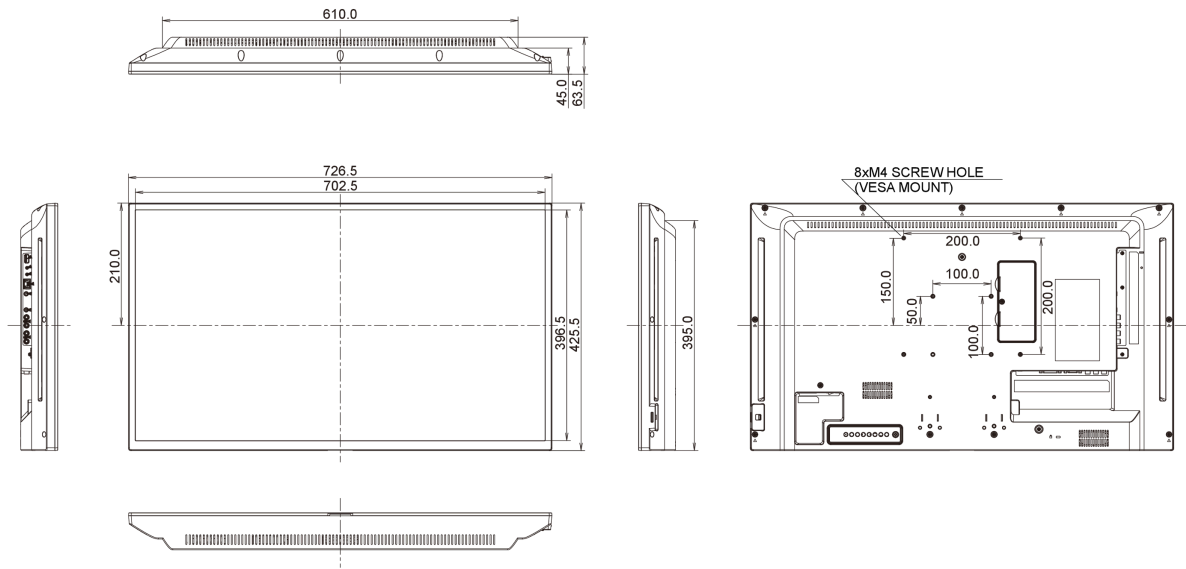

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IYAMA CORPORATION. ALL RIGHTS RESERVED