



Unleash your full gaming potential with the Fast IPS GB2770QSU Red Eagle

Get the competitive edge you need to unleash your full gaming potential with the 27" WQHD (2560x1440) GB2770QSU offering a stunning 0.5ms MPRT and 165Hz refresh rate. Armed with FreeSync Premium Pro you can make split second decisions and forget about ghosting effects or smearing issues. The ability to adjust brightness and the dark shades with the Black Tuner delivers greater viewing performance in shadowed areas and the IPS panel technology guarantees superb image quality. Thanks to the height adjustable stand you can easily adjust the screen position to your preferences to ensure comfort during marathon gaming sessions.

Available also with fixed stand: <u>G-Master G2770HSU-B1 (1920x1080)</u> and <u>G-Master G2770QSU-B1 (2560x1440)</u>



Fast IPS

The Fast IPS panel technology guarantees not only high-fidelity, vivid battleground scenes displayed with outstanding colour accuracy but provides also an outstanding 0.5ms Moving Picture Response Time (MPRT).



FREESYNC™ PREMIUM PRO TECHNOLOGY

This monitor supports HDR content with meticulous colour and luminance. Low input latency and low framerate compensation put an end to any tearing or stuttering issues at virtually any framerate.



| Diagonal | 27", 68.5cm |
|----------------------|---|
| Panel | Fast IPS, matte finish |
| Native resolution | 2560 x 1440 @165Hz (3.7 megapixel WQHD, DisplayPort) |
| Aspect ratio | 16:9 |
| Panel brightness | 400 cd/m ² |
| Static contrast | 1000:1 |
| Advanced contrast | 80M:1 |
| Response time (MPRT) | 0.5ms |
| Viewing zone | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support | 16.7mln 8bit |
| Horizontal Sync | 30 - 242kHz |
| Viewable area W x H | 596.7 x 335.6mm, 23.5 x 13.2" |
| Pixel pitch | 0.233mm |
| Colour | matte, black |



02 INTERFACES / CONNECTORS / CONTROLS

| Signal input | HDMI x1 (v.2.0, max. 2560 x 1440 @144Hz) DisplayPort x1 (v.1.4, max. 2560 x 1440 @165Hz) |
|---------------------|---|
| USB HUB | x2 (v.3.0 DC5V, 900mA) |
| HDCP | yes |
| Headphone connector | yes |



03 FEATURES

| Blue light reducer | yes |
|-----------------------|---|
| Flicker free | yes |
| Adaptive Sync support | HDMI: 2560 x 1440 @40-144Hz, DP: 2560 x 1440 @40-165Hz |
| HDR | 400 |
| OSD languages | EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL |
| Control buttons | Power, Menu/ Select, +/ Volume, -/ ECO, Exit, Input Select |
| User controls | picture adjust (contrast, brightness, overdrive, ACR, ECO, blue light reducer, Black Tuner, MBR, gamma), input select, audio adjust (volume, mute), store user settings, colour settings (colour temperature, 6-Axis, user preset), image adjust (i-Style colour, X-Res Technology, sharp & soft, RGB range, video mode adjust), language, setup menu (OSD H. position, OSD V. position, OSD rotation, OSD time out, opening logo, AMD FreeSync Premium Pro, LED), display information, reset |
| Speakers | 2 x 2W |
| Convenience | Kensington-lock™ prepared, DDC2B, Mac OSX |



MECHANICAL

| Display position adjustments | height, pivot (rotation), tilt |
|------------------------------|--------------------------------|
| Height adjustment | 130mm |
| Rotation (PIVOT function) | 90° |
| Tilt angle | 18° up; 3° down |
| VESA mounting | 100 x 100mm |
| Cable management system | yes |



| Cables | power, USB, HDMI, DP |
|--------|---------------------------------|
| Other | quick start guide, safety guide |

06 POWER MANAGEMENT


| Power supply unit | internal |
|-------------------|---|
| Power supply | AC AC - 100V, 240/V, 50Hz |
| Power usage | 35W typical, 0.5W stand by, 0.3W off mode |

07 SUSTAINABILITY

| Energy efficiency class (Regulation (EU) G | 4 |
|--|---|
| 2017/1369) | |
| REACH SVHC above 0.1%: Lead | |

08 DIMENSIONS / WEIGHT

| Product dimensions W x H x D | 614 x 409.5 (539.5) x 256mm |
|------------------------------|-----------------------------|
| Box dimensions W x H x D | 740 x 456 x 215mm |
| Weight (without box) | 5.4kg |
| Weight (with box) | 7.4kg |
| EAN code | 4948570118328 |

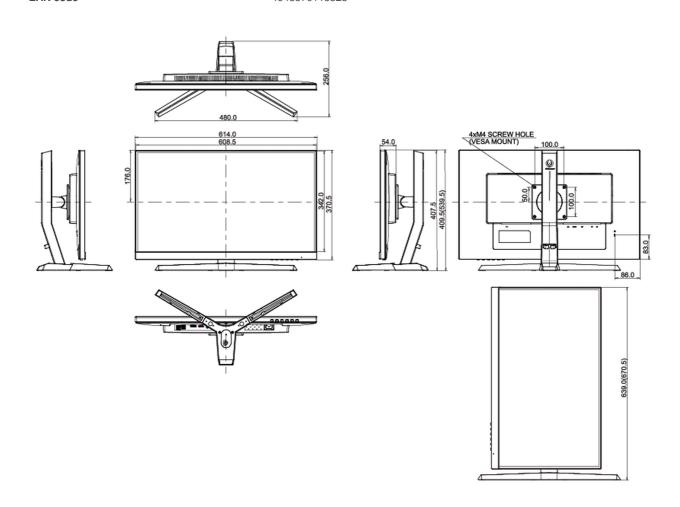

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED