


### 32" Full HD professional large format display

The ProLite LE3240S is a 32" Full HD, professional and fanless LED-backlit display. Incorporating the latest Commercial Grade VA panel technology, the display guarantees great viewing from all angles, high brightness and exceptional colour clarity. A wide range of video and audio inputs ensures compatibility with multiple platforms. ProLite LE3240S is prepared for easy installation using the VESA wall mount. This display will suit a massive range of applications including public signage, retail, exhibitions and conference centres, POS/POI, control rooms and production facilities.



VA

VA panel technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.

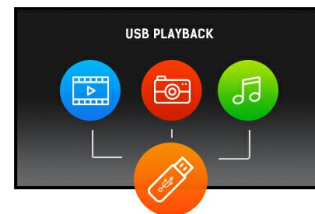

USB Playback

The monitor supports playback of presentations, video and almost any type of content stored on the USB device or internal memory.

## 01 DISPLAY CHARACTERISTICS

|                                  |   |
|----------------------------------|---|
| Diagonal                         | 31.5", 80cm   |
| Panel                            | VA, mild matte finish, haze 2%  |
| Native resolution                | 1920 x 1080 (2.1 megapixel Full HD)                                   |
| Aspect ratio                     | 16:9  |
| Panel brightness                 | 350 cd/m <sup>2</sup>   |
| Static contrast                  | 4000:1  |
| Response time (GTG)              | 8ms   |
| Viewing zone                     | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support                   | 16.7mIn 8bit  |
| Horizontal Sync                  | 28 - 92kHz  |
| Viewable area W x H              | 698.4 x 392.85mm, 27.5 x 15.5"  |
| Bezel width (sides, top, bottom) | 12mm, 12mm, 17mm  |
| Pixel pitch                      | 0.364mm   |
| Bezel colour and finish          | black, glossy   |

## 02 INTERFACES / CONNECTORS / CONTROLS

|                        |                                      |
|------------------------|--------------------------------------|
| Analog signal input    | VGA x1                               |
| Digital signal input   | HDMI x3 (2.0)                        |
| Audio input            | Mini jack x1 (for VGA)               |
| Monitor control input  | RS-232c x1<br>RJ45 (LAN) x1<br>IR x1 |
| Audio output           | RCA (L/R) x1<br>Speakers 2 x 10W     |
| Monitor control output | RS-232c x1<br>IR loop through x1     |
| HDCP                   | yes                                  |
| USB ports              | x1 (v.2.0 media playback)            |

## 03 FEATURES

|                              |         |
|------------------------------|---------|
| Max. non-stop operating time | 16/7    |
| Media playback               | yes     |
| Housing (bezel)              | plastic |

## 04 GENERAL

|                 |  |
|-----------------|--|
| OSD languages   | EN, DE, FR, ES, IT, RU, CZ, NL, PL   |
| Control buttons | Power, Mute, Input, +, -, Up, Down, Menu   |
| User controls   | picture (picture mode, backlight, contrast, brightness, chroma, phase, sharpness, colour temp., noise reduction, film mode, rest), sound (sound mode, treble, bass, balance, surround, speaker, audio source, reset), screen (PAP setting, display wall, aspect, adjust screen, freeze), setting (language, schedule, power save, control setting, network settings, set monitor ID, HDMI control, advanced, information, reset all) |
| Plug&Play       | DDC2B, Mac OSX   |

## 05 MECHANICAL

|  |                          |
|--|--------------------------|
| <b>Orientation</b>                         | landscape                |
| <b>Fanless design</b>                      | yes                      |
| <b>VESA mounting</b>                       | 100 x 100mm, 200 x 200mm |
| <b>Operation temperature range (-°/+°)</b> | -0°C - 40°C              |
| <b>Storage temperature range</b>           | - 20°C - 60°C            |

## 06 ACCESSORIES INCLUDED

|                       |                                 |
|-----------------------|---------------------------------|
| <b>Cables</b>         | power C7, HDMI, RS-232c         |
| <b>Guides</b>         | quick start guide, safety guide |
| <b>Remote control</b> | yes                             |

## 07 POWER MANAGEMENT


|                          |   |
|--------------------------|---|
| <b>Power supply unit</b> | internal                                    |
| <b>Power supply</b>      | AC 100 - 240V, 50/60Hz                      |
| <b>Power usage</b>       | tbd.W typical, 0.5W stand by, 0.3W off mode |

## 08 SUSTAINABILITY

|                    |  |
|--------------------|--|
| <b>Regulations</b> | CB, CE, TÜV-Bauart, RoHS support, ErP, WEEE, CU, REACH |
| <b>REACH SVHC</b>  | above 0.1%: Lead                                       |

## 09 DIMENSIONS / WEIGHT

|                                     |                        |
|-------------------------------------|------------------------|
| <b>Product dimensions W x H x D</b> | 726.5 x 425.4 x 65.1mm |
| <b>Box dimensions W x H x D</b>     | 818 x 547 x 139mm      |
| <b>Weight (without box)</b>         | 5.7kg                  |
| <b>Weight (with box)</b>            | 7,7kg                  |
| <b>EAN code</b>                     | 4948570119486          |

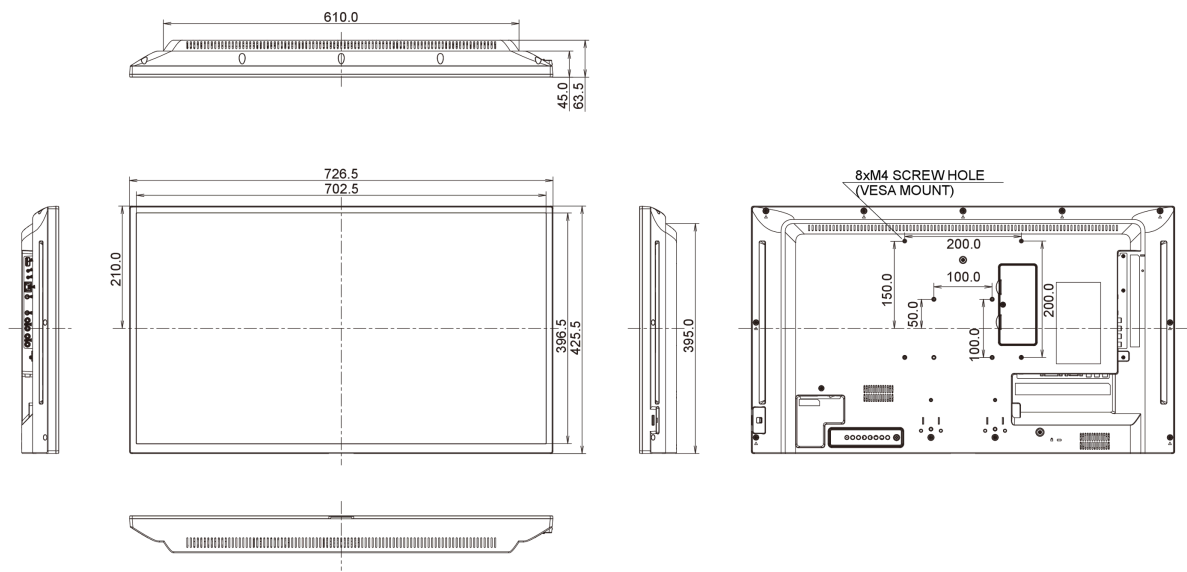

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IYAMA CORPORATION. ALL RIGHTS RESERVED